

Flowermate Wix Manual



Wix features an all borosilicate heating chamber that delivers smooth hits with ultra-crisp flavor. Includes black ceramic mouthpiece that allows easy and comfortable puffs.



#### INTRODUCING THE WIX OIL VAPORIZER

Flowermate WIX is one of the original pen vaporizers using concentrate/wax/extraction. It is a sleek and compact vaporizer pen with pure ceramic heating coil and features three pre setting temperature- high, medium and low. The entire device is constructed of high quality materials and comes with a distinct black ceramic mouthpiece and borosilicate heating chamber. WIX supports type C charging, 350mAh battery and 10 second pre heating that allows you to enjoy quick dabs anytime, anywhere.







Pure Ceramic Heating Coil



350mAh battery



Type-C charging



Zirconia Mouthpiece











#### 10 SECONDS PRE-HEATING

Preheat Mode powers the WIX concentrate pen and make sure that the device is up and running for you to start using it.

### **ZIRCONIA MOUTHPIECE**

WIX features zirconia mouthpiece that offers pure flavor and smooth taste, making it 20x times more durable than other materials.






#### **TYPE-C CHARGING**

WIX employs USB TYPE-C that can carry reliable power and faster transfer speed, thereby providing more stable performance, and secure charging.

- 1 Zirconia Mouthpiece
- 2 -Replacable Atomizer
- 3 Air Vent
- 4 Home Button + LED Light
- 5 Type C-Port
- 6 510 Thread Battery

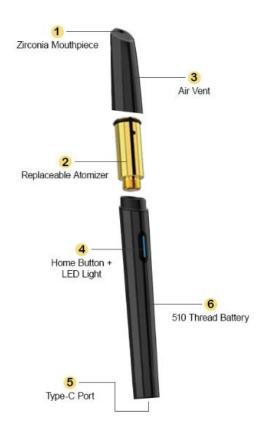

## WHAT'S INCLUDED:



## **Specification**

**Size** 14.3mm\*13.8mm\*122.5mm

Capacity 350mAh

**Standby Mode** Power consumption <15µA

**Load** Load range: 0.5- $0.8 \Omega$ 

**Turn On/Off** In standby mode, press the button to shut down 5 times within 2S, and the blue-green-red horse flashes once in order to prompt shutdown.

**Tap Switching and Output** In standby (power on) state, press the button for 3 times continuously for 1.5s to switch the gear, each time can only switch the gear once, blue-green-red-blue...Switch in turn.

First- blue: 3.3V; Second-green :3.6V; Third-red: 3.8V

**Working Mode (Carrying/Smoking)** Load detection (whether on or off): the current gear light of the load will shine once (duration: 300ms). On (standby), press the button not to release, press the current gear voltage output (the corresponding color light will be longer on display), release the button to stop the work immediately.

**Timeout** Timeout: the maximum working time is 15s, and the indicator light of timeout current status flashes 3 times quickly.

**Low Power Protection** The battery voltage under no load is less than 3.2V (the battery voltage under load is less than 2.8V). Press the button and it will not work, and the red light will flash 5 times.

**Short Circuit Protection** In case of short circuit of heating wire or low resistance value ( $< 0.6\Omega$  should be protected), MOS will be automatically shut down to stop output to prevent burnt circuit board.

**Charging** 1. Type-C charging port

- 2. 5V500mA/1A/2A input, 4.2±1%V current 450-500mA at the battery end.
- 3. You can smoke output when charging, priority to display the working gear light, do not smoke display charging indication.

Scintillation Period 250/250ms

Output Interface 510 Thread



# CANATURA

HEMP FOR LIFE

Canatura - Online store with the best hemp products for your health

www.canatura.com/en

Copyright reserved